


BOILER DRAIN VALVES

BOILER DRAIN VALVE

776300



- M/M boiler drain valve with operating key in cap
- Finishing nickel-plated
- Thread ISO 228
- Temperature range min-10°C - max +120°C

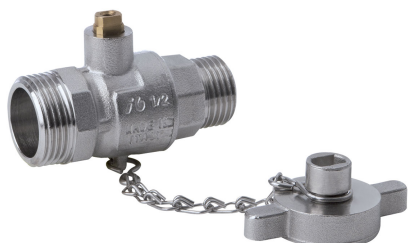


Valve suitable for interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing and heating systems are the ideal fields of application, where this valve is used to unload heat transfer fluids from the heating system.

It's a reduced bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two O-Rings with an internally installed stem and anti-ejection system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

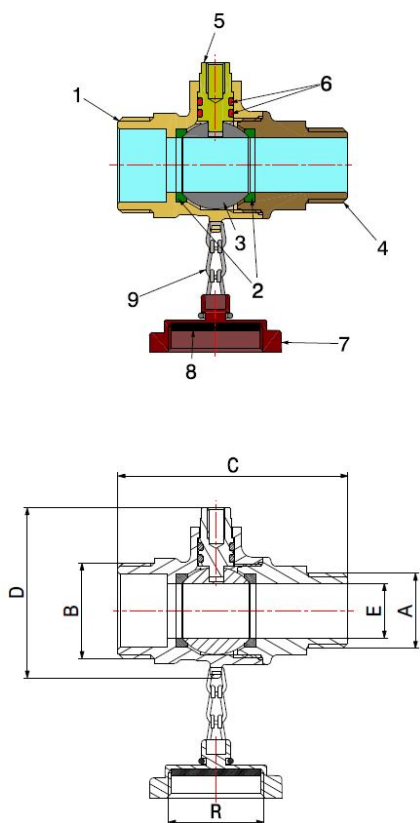

COMPONENTS

| POS. | PART NAME | N° | MATERIAL |
|------|----------------|----|-----------------------------------|
| 1 | Body | 1 | CW617N UNI-EN 12165 nickel-plated |
| 2 | Seal | 2 | PTFE |
| 3 | Ball | 1 | CW617N UNI-EN 12164 chrome-plated |
| 4 | End connection | 1 | CW617N UNI-EN 12165 nickel-plated |
| 5 | Stem | 1 | CW617N UNI-EN 12164 |
| 6 | O-Ring | 2 | EPDM 70 Perox |
| 7 | Plug | 1 | CW617N UNI-EN 12165 nickel-plated |
| 8 | Gasket | 1 | SBR |
| 9 | Chain | 1 | Iron |

DIMENSIONS

| DN | A | B | C | D | E | R | PN |
|----|------|------|----|----|----|------|----|
| 15 | 1/2" | 3/4" | 63 | 46 | 15 | 3/4" | 40 |

PACKAGING

| | |
|------------|----------|
| CODE | 77630004 |
| PCS BOX | 10 |
| PCS CARTON | 100 |