


BOILER DRAIN VALVES

BOILER DRAIN VALVE

7756

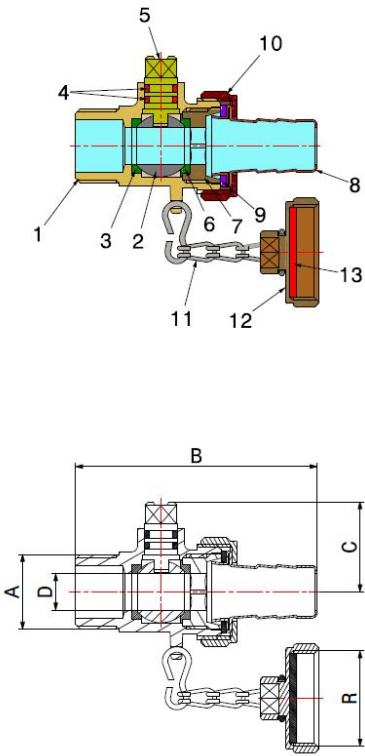

- 1/2" boiler drain valve with operating key in cap
- Finishing sandblasted yellow
- Thread ISO 228
- Temperature range min 0°C - max +90°C

Valve suitable for interrupting fluids that are generally non-corrosive, compatibly with the valve materials.

Plumbing and heating systems are the ideal fields of application, where this valve is used to unload heat transfer fluids from the heating system.

It's a reduced bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two O-Rings with an internally installed stem and anti-ejection system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

COMPONENTS			
POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Ball	1	CW617N UNI-EN 12164 chrome-plated
3	Seal	1	PTFE
4	O-Ring	2	EPDM Perox
5	Stem	1	CW617N UNI-EN 12164
6	Shaped retaining ring	1	PTFE
7	Nut ring	1	CW617N UNI-EN 12164
8	Hose connection	1	CW508L UNI-EN 1652
9	Pipe gasket	1	SBR
10	Swiveling nut	1	CW617N UNI-EN 12165
11	Chain	1	Brassed iron
12	Plug	1	CW617N UNI-EN 12165
13	Plug gasket	1	SBR

DIMENSIONS						
DN	A	B	C	D	R	PN
15	1/2"	67	25	10	3/4"	25

PACKAGING

	1/2"
CODE	77560004
PCS BAG	1
PCS CARTON	150