

WATER BALL VALVES

DANUBIO

774800




- M/M water ball valve with T handle
- Thread ISO 228
- Temperature range min -10°C - max +95°C

Valve suitable for distributing and interrupting liquids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial and agricultural sectors are the ideal fields of application. It's a standard bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two O-Rings with an internally installed stem and anti-ejection system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

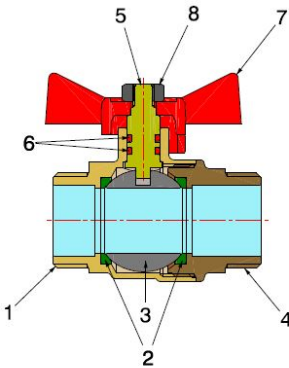


COMPONENTS

| POS. | PART NAME | N° | MATERIAL |
|------|----------------|----|-----------------------------------|
| 1 | Body | 1 | CW617N UNI-EN 12165 nickel-plated |
| 2 | Seal | 2 | PTFE |
| 3 | Ball | 1 | CW617N UNI-EN 12165 chrome-plated |
| 4 | End connection | 1 | CW617N UNI-EN 12165 nickel-plated |
| 5 | Stem | 1 | CW617N UNI-EN 12164 |
| 6 | O-Ring | 2 | NBR |
| 7 | "T" handle | 1 | Lacquered aluminium |
| 8 | Nut | 1 | Galvanised iron |

DIMENSIONS

| DN | A | B | C | D | E | PN |
|----|------|----|----|----|------|----|
| 15 | 1/2" | 52 | 38 | 54 | 14 | 40 |
| 20 | 3/4" | 58 | 41 | 54 | 18 | 40 |
| 25 | 1" | 69 | 46 | 54 | 22,5 | 40 |

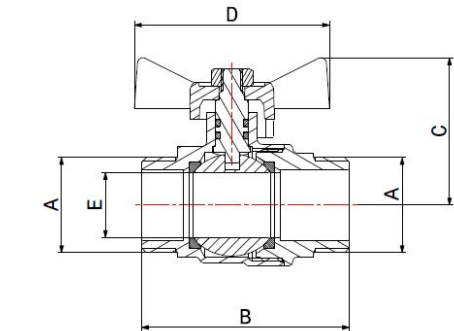

PACKAGING

| | | | |
|------------|-----------|-----------|-----------|
| | 1/2" | 3/4" | 1" |
| CODE | 77480004R | 77480006R | 77480008R |
| PCS BOX | 20 | 15 | 10 |
| PCS CARTON | 240 | 150 | 100 |