UPPER PARTS

# UPPER PART WITH SPRING

## 7550XC

- Upper part with spring - fixed stem
- Male thread ISO 228
- Temperature range min 0°C - max +95°C

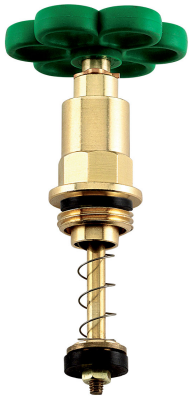

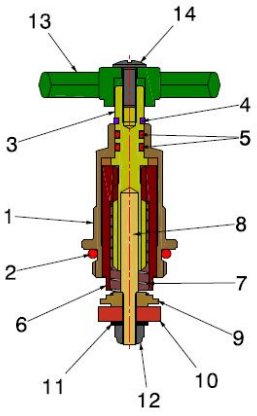


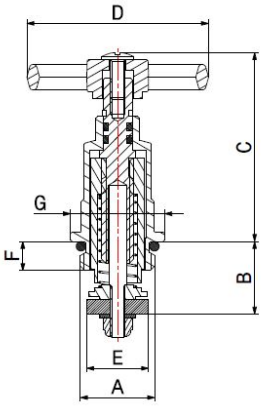


### COMPONENTS

| POS. | PART NAME | N° | MATERIAL |
|---|---|---|---|
| 1 | Upper part body | 1 | CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (from 1" to 2") |
| 2 | O-Ring | 1 | KTW approved EPDM Perox |
| 3 | Upper part stem | 1 | CW617N UNI-EN 12164 |
| 4 | Snap ring | 1 | Phosphorous bronze |
| 5 | O-Ring | 2 | KTW approved EPDM Perox |
| 6 | Valve | 1 | CW617N UNI-EN 12164 |
| 7 | Spring | 1 | AISI 302 stainless steel |
| 8 | Hose end stem | 1 | CW617N UNI-EN 12164 |
| 9 | Gasket holder disc | 1 | CW617N UNI-EN 12164 |
| 10 | Gasket | 1 | KTW approved EPDM Perox |
| 11 | Washer | 1 | CW508L UNI-EN 1652 |
| 12 | Self-locking nut | 1 | Brass + Plastic |
| 13 | Handwheel | 1 | Plastic |
| 14 | Screw | 1 | CW508L UNI-EN 12166 |

### DIMENSIONS

| A | B min | B max | C | D | E | F | G | PN |
|---|---|---|---|---|---|---|---|---|
| 1/2" | 17 | 35 | 53 | 50 | 17 | 8 | 25,5 | 16 |
| 3/4" | 19 | 43 | 59 | 55 | 22 | 9 | 31,5 | 16 |
| 1" | 20 | 52 | 70 | 55 | 29 | 10,5 | 39,5 | 16 |
| 1.1/4" | 21,5 | 63 | 82 | 70 | 37 | 11 | 49 | 16 |
| 1.1/2" | 23 | 72 | 87 | 70 | 42 | 12 | 56 | 16 |
| 2" | 26 | 90 | 97 | 70 | 55 | 14 | 68 | 16 |

### PACKAGING

| | 1/2" | 3/4" | 1" | 1.1/4" | 1.1/2" | 2" |
|---|---|---|---|---|---|---|
| **CODE** | **75500004XC** | **75500006XC** | **75500008XC** | **75500010XC** | **75500011XC** | **75500013XC** |
| PCS BOX | - | - | - | - | - | - |
| PCS CARTON | 250 | 150 | 80 | 60 | 40 | 20 |