
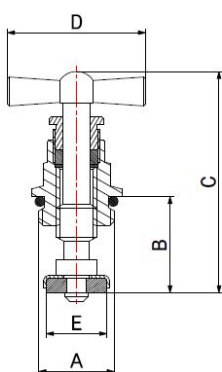


UPPER PARTS

**UPPER PART MOVING STEM**

2490

- Upper part - moving stem with lever
- Male thread ISO 228
- Temperature range min 0°C - max +95°C



**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Upper part body	1	CW617N UNI-EN 12164
2	Upper part gasket	1	For 1/2" O-Ring gasket in NBR - For 3/8" flat gasket in fiber
3	Screw	1	CW617N UNI-EN 12164
4	Washer	1	CW508L UNI-EN 1652
5	Gasket screw	1	NBR
6	Gland	1	CW617N UNI-EN 12164
7	Gasket	1	NBR
8	Gasket holder disc	1	AISI 304 stainless steel (only 1/2")
9	Lever	1	CW617N UNI-EN 12164

**DIMENSIONS**

A	B min	B max	C	D	E	PN
3/8"	9	16	52	38	13	16
1/2"	16,5	27	60	38	16	16

**PACKAGING**

	3/8"	1/2"
<b>CODE</b>	<b>24900003</b>	<b>24900004</b>
PCS BOX	-	-
PCS CARTON	500	400