

WATER BALL VALVES

DANUBIO



865000

- M/F water ball valve with connector and red T handle
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Valve suitable for distributing and interrupting liquids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial and agricultural sectors are the ideal fields of application. It's a standard bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two O-Rings with an internally installed stem and anti-ejection system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

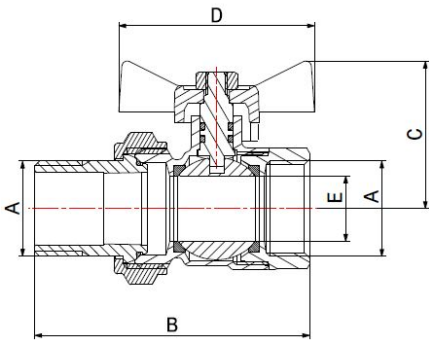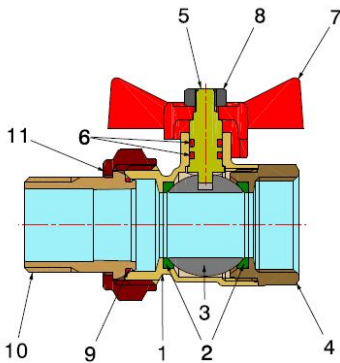

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Seal	2	PTFE
3	Ball	1	CW617N UNI-EN 12165 chrome-plated
4	End connection	1	CW617N UNI-EN 12165 nickel-plated
5	Stem	1	CW617N UNI-EN 12164
6	O-Ring	2	NBR
7	"T" handle	1	Lacquered aluminium
8	Nut	1	Galvanised iron
9	O-Ring	1	NBR
10	Connector	1	CW617N UNI-EN 12165 nickel-plated
11	Nut	1	CW617N UNI-EN 12165 nickel-plated

DIMENSIONS

DN	A	B	C	D	E	PN
15	1/2"	66	38	54	14	40
20	3/4"	76	41	54	18	40
25	1"	86	46	54	22,5	40

PACKAGING

	1/2"	3/4"	1"
CODE	86500004R	86500006R	86500008R
PCS BOX	15	10	6
PCS CARTON	150	100	72