
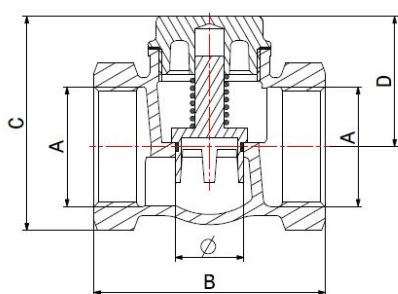


CHECK VALVES

**HORIZONTAL VALVE
RUBBER SEAT**

3001



- Horizontal valve rubber seat
- Thread ISO 228 - on request NPT
- Temperature range min -10°C - max +100°C / min +14°F -max +212°F

Valve suitable for distributing, regulating and interrupting liquids that could cause dezincification problems. It is especially recommended in harsh environments, such as marine ones, as long as the liquid is not salt water or with impurities that could damage the sealing. Shipbuilding, plumbing, heating and industrial sectors are the ideal fields of application. The flow direction is indicated by an arrow on the valve body, while the installation can only be in horizontal position.

The seat tightness is guaranteed by a EPDM seal.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	Bronze CC491K UNI-EN 1982:2000
2	Cap	1	CW617N UNI-EN 12164 (3/8" to 3/4") - CW617N UNI-EN 12165 (1" to 3")
3	Cap gasket	1	PTFE
4	Spring	1	AISI 302 stainless steel
5	O-Ring	1	EPDM
6	Valve seal	1	CW617N UNI-EN 12164 (1/2" to 1.1/2") - CW617N UNI-EN 12165 (2" to 3")

DIMENSIONS MM

DN	A	B	C	D	Ø	PN
15	1/2"	50	45	30	11	16
20	3/4"	55	52	33	13	16
25	1"	64	59	36	19	16
32	1.1/4"	73	71	42	23	16
40	1.1/2"	83	80	48,5	29	16
50	2"	88	95	56,5	36	16
65	2.1/2"	150	128	80,5	62	16
80	3"	165	146	95	76	16

PACKAGING

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"
CODE	3001010D00	3001010E00	3001010F00	3001010G00	3001010H00	3001010I00	3001010J00	3001010K00
PCS BOX	20	15	10	-	-	-	-	-
PCS CARTON	160	120	80	50	40	30	8	6