



STRAINERS

BRONZE Y STRAINER

2030



- Bronze Y strainer with soldering end connections
- Temperature range min 0°C - max +95°C / min +32°F - max +203°F
- Standard strainer 900 micron hole – 18 mesh
- On request
 - 500 micron hole - 40 mesh
 - 350 micron hole - 50 mesh
 - 200 micron hole - 80 mesh
 - 140 micron hole - 100 mesh

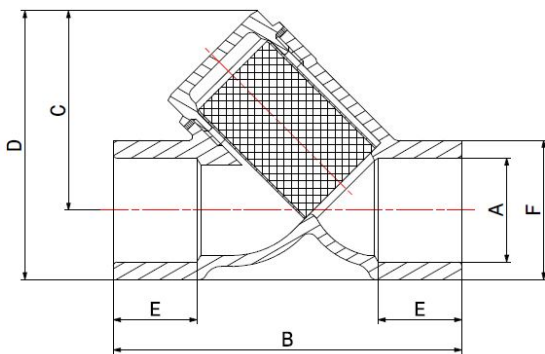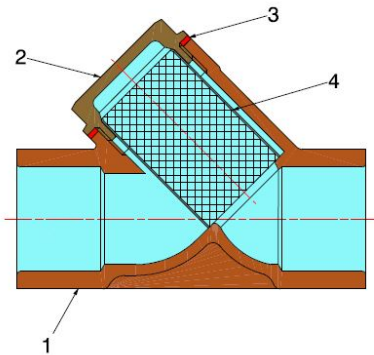

Strainer suitable for performing a filtration function of liquids that could cause dezincification problems, therefore it is especially recommended in harsh environments, such as marine ones. Shipbuilding, plumbing, heating and industrial sectors are the ideal fields of application. The flow direction is indicated by an arrow on the valve body, while the installation can be in horizontal or vertical position. The strainer tightness is guaranteed by a carbon-filled PTFE seal.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	Bronze CC491K UNI-EN 1982:2000
2	Cap	1	CW617N UNI-EN 12164 (3/8" and 1/2") - CW617N UNI-EN 12165 (3/4" to 2")
3	Cap gasket	1	PTFE
4	Strainer	1	AISI 304 stainless steel

DIMENSIONS MM

DN	A	B	C	D	E	F	PN
15	15,95	70	35	46	16,5	21	16
20	22,32	85	42	56	20	27,4	16
25	28,65	96	54	71	23	34	16
32	35,04	116	63	84	25	41,4	16
40	41,38	135	76	100	28,5	48,4	16
50	54,08	155	91	122	34	61,1	16

DIMENSIONS INCHES

MIS.	A	B	C	D	E	F	PSI
1/2"	0,628	2,756	1,378	1,811	0,650	0,827	200
3/4"	0,879	3,346	1,654	2,205	0,787	1,079	200
1"	1,128	3,780	2,126	2,795	0,906	1,339	200
1.1/4"	1,380	4,567	2,480	3,307	0,984	1,630	200
1.1/2"	1,629	5,315	2,992	3,937	1,122	1,906	200
2"	2,129	6,102	3,583	4,803	1,339	2,406	200

PACKAGING

	1/2" - A=15,95	3/4" - A=22,32	1" - A=28,65	1.1/4" - A=35,04	1.1/2" - A=41,38	2" - A=54,08
CODE	2030011R00	2030011T00	2030011U00	2030011V00	2030011W00	2030011X00
PCS BOX	20	10	10	-	-	-
PCS CARTON	200	100	50	24	16	12