
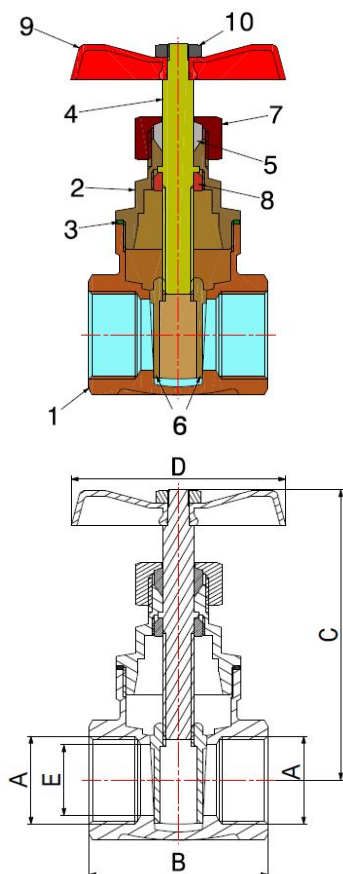


GATE VALVES

BRONZE GATE VALVE

2700

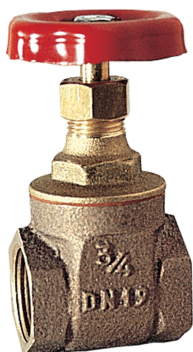

- Bronze gate valve
- Thread ISO 228
- Temperature range min 0°C - max +80°C / min +32°F - max +176°F

Valve suitable for distributing, regulating and interrupting liquids that could cause dezincification problems. It is especially recommended in harsh environments, such as marine ones, as long as the liquid is not salt water or with impurities that could damage the sealing. Shipbuilding, plumbing, heating and industrial sectors are the ideal fields of application.

The seat tightness is guaranteed by a metal-to-metal seal.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	Bronze SN UNI-EN 1982 DIN50930/6
2	Upper part	1	CW617N UNI-EN 12165
3	Body gasket	1	Guarnital fiber
4	Stem	1	CW617N UNI-EN 12164
5	Stem gasket	1	Dutral EPDM90
6	Disk	2	Delta brass C EN 1982 CB 754S
7	Gland	1	CW617N UNI-EN 12164
8	Ring	1	CW617N UNI-EN 12164
9	Handwheel	1	Red epoxy-resin plasticized steel
10	Handwheel fixed nut	1	Galvanised iron

DIMENSIONS MM

DN	A	B	C	D	E	PN
15	1/2"	38	68	45	15	16
20	3/4"	45	78	50	19	16
25	1"	48	92	55	24	16
32	1.1/4"	51	108	60	32	16
40	1.1/2"	58	125	70	37	16
50	2"	62	145	80	47	16
65	2.1/2"	76	175	100	60	16
80	3"	80	200	100	72	16
100	4"	96	240	120	93	16

PACKAGING

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	2700610D00	2700610E00	2700610F00	2700610G00	2700610H00	2700610I00	2700610J00	2700610K00	2700610M00
PCS BOX	20	20	10	10	5	5	-	-	-
PCS CARTON	160	100	80	50	35	25	15	12	6