

MANIFOLDS



MANIFOLD WITH ADAPTORS

3752



- Manifold with valves and PEX-AL-PEX adaptors
- Finishing nickel-plated
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Manifold particularly suitable for distributing sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application.

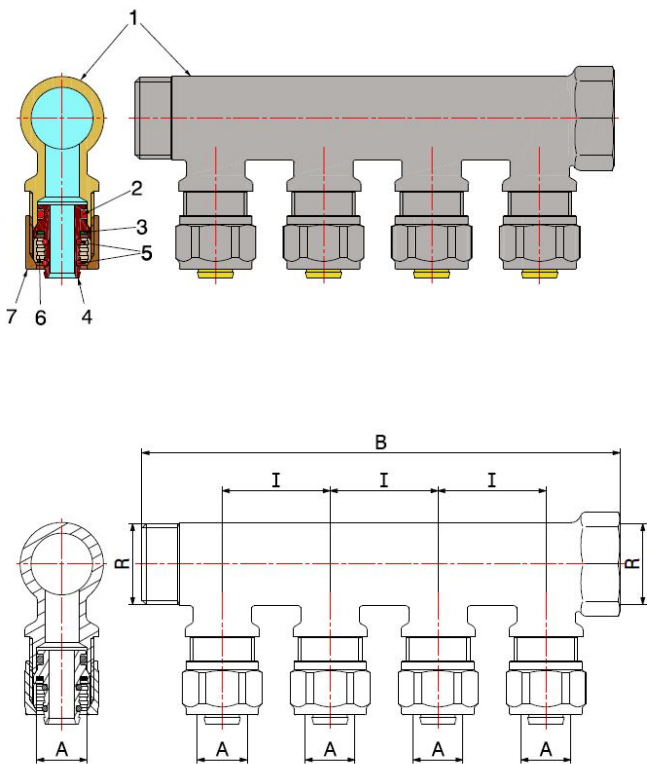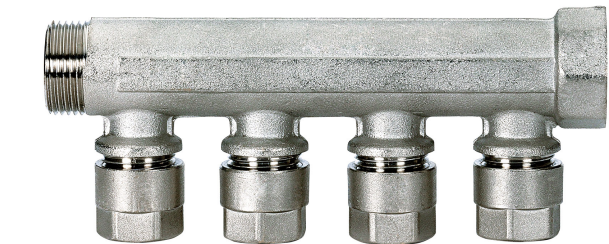

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	O-Ring	1	EPDM Perox
3	Washer	1	PTFE
4	Hose-end pipe	1	CW617N UNI-EN 12164
5	O-Ring	2	EPDM Perox
6	Ogive	1	CW617N UNI-EN 12164
7	Nut	1	CW617N UNI-EN 12164 nickel-plated

DIMENSIONS

N. OF WAY	R	A	I	B	PN
2	3/4"	16	35	83	10
2	1"	16	35	90	10
3	3/4"	16	35	118	10
3	1"	16	35	125	10
4	3/4"	16	35	153	10
4	1"	16	35	158	10
5	3/4"	16	36	190	10
5	1"	16	36	195	10

PACKAGING

	2 WAY 3/4"	2 WAY 1"	3 WAY 3/4"	3 WAY 1"	4 WAY 3/4"	4 WAY 1"	5 WAY 3/4"	5 WAY 1"
CODE	3752120616	3752120816	3752130616	3752130816	3752140616	3752140816	3752150616	3752150816
PCS BAG	5	5	5	5	5	5	5	5
PCS CARTON	40	40	30	25	30	25	20	20