
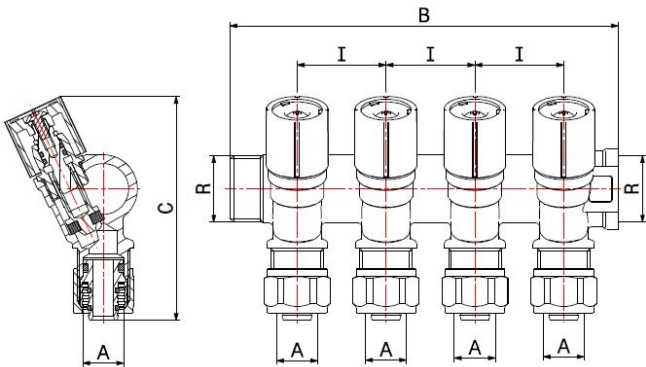


MANIFOLDS

MANIFOLD WITH VALVES
AND ADAPTORS

3751

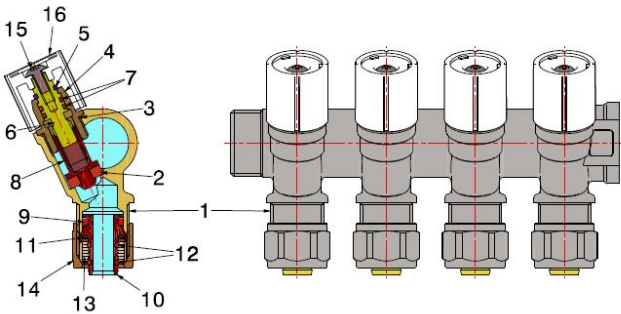

- Manifold with valves and diam. 16 PEX-AL-PEX adaptors
- Finishing nickel-plated
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Manifold particularly suitable for distributing and interrupting sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application. The seat tightness is guaranteed by a EPDM PEROX seal, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Gasket	1	EPDM Perox
3	Upper part O-Ring	1	EPDM Perox
4	Upper part	1	CW617N UNI-EN 12164
5	Snap ring	1	Phosphorous bronze
6	Stem	1	CW617N UNI-EN 12164
7	O-Ring	2	EPDM Perox
8	Valve	1	CW617N UNI-EN 12164
9	O-Ring	1	EPDM Perox
10	Hose-end pipe	1	CW617N UNI-EN 12164
11	Seal	1	PTFE
12	O-Ring	2	EPDM Perox
13	Ogive	1	CW617N UNI-EN 12164
14	Nut	1	CW617N UNI-EN 12164 nickel-plated
15	Screw	1	Stainless steel
16	Handle	1	Plastic

DIMENSIONS

N. OF WAY	R	A	I	B	PN
2	3/4"	16x2	35	83	10
2	1"	16x2	35	90	10
3	3/4"	16x2	35	118	10
3	1"	16x2	35	125	10
4	3/4"	16x2	35	153	10
4	1"	16x2	35	158	10
5	3/4"	16x2	35	188	10
5	1"	16x2	35	195	10

PACKAGING

	2 WAY 3/4"	2 WAY 1"	3 WAY 3/4"	3 WAY 1"	4 WAY 3/4"	4 WAY 1"	5 WAY 3/4"	5 WAY 1"
CODE	37510206W16	37510208W16	37510306W16	37510308W16	37510406W16	37510408W16	37510506W16	37510508W16
PCS BAG	1	1	1	1	1	1	1	1
PCS CARTON	50	50	50	50	40	40	30	30