

MANIFOLDS



MANIFOLDS WITH VALVES
AND ADAPTORS

3725



- Manifold with valves and D.16 adaptors for PEX-AL-PEX pipe
- Finishing nickel-plated
- Threads ISO 228
- M22x1,5 side connections
- Temperature range min 0°C - max +95°C

Manifold particularly suitable for distributing and interrupting sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application. The seat tightness is guaranteed by a EPDM PEROX seal, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

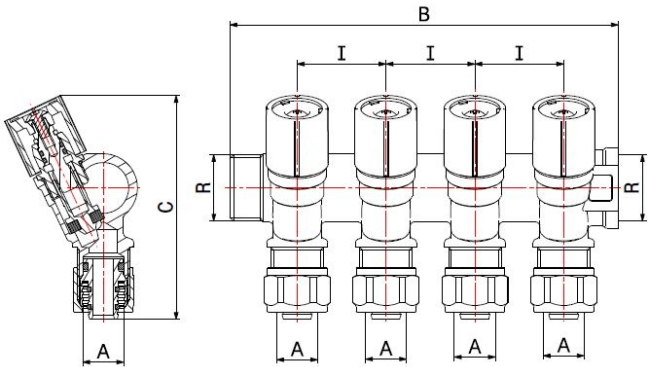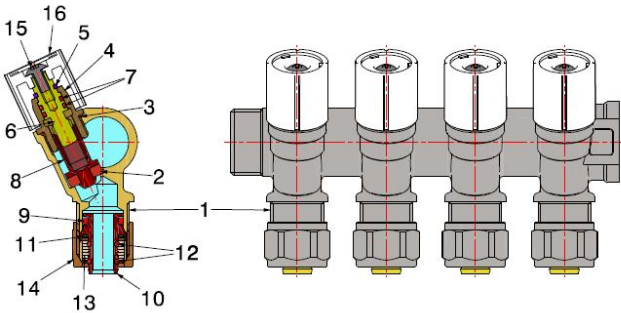

COMPONENTS

| POS. | PART NAME | N° | MATERIAL |
|------|---------------|----|-----------------------------------|
| 1 | Body | 1 | CW617N UNI-EN 12165 nickel-plated |
| 2 | Seal | 1 | EPDM Perox |
| 3 | O-Ring | 1 | EPDM Perox |
| 4 | Upper part | 1 | CW614N UNI-EN 12164 |
| 5 | Snap ring | 1 | Bronze CC491K UNI-EN 1982:200 |
| 6 | Stem | 1 | CW614N UNI-EN 12164 |
| 7 | Stem O-Ring | 2 | EPDM Perox |
| 8 | Valve | 1 | CW614N UNI-EN 12164 |
| 9 | O-Ring | 1 | EPDM Perox |
| 10 | Hose-end pipe | 1 | CW614N UNI-EN 12164 |
| 11 | Seal | 1 | PTFE |
| 12 | O-Ring | 2 | EPDM Perox |
| 13 | Ogive | 1 | CW614N UNI-EN 12164 |
| 14 | Nut | 1 | CW614N UNI-EN 12164 nickel-plated |
| 15 | Screw | 1 | Stainless steel |
| 16 | Handle | 1 | Plastic |

DIMENSIONS

| N. OF WAY | R | A | I | B |
|-----------|------|------|----|-----|
| 2 | 3/4" | 16x2 | 35 | 83 |
| 3 | 3/4" | 16x2 | 35 | 118 |
| 4 | 3/4" | 16x2 | 35 | 153 |

PACKAGING

| | 2 WAY 3/4" | 3 WAY 3/4" | 4 WAY 3/4" |
|------------|-------------|-------------|-------------|
| CODE | 37250206W16 | 37250306W16 | 37250406W16 |
| PCS BAG | 1 | 1 | 1 |
| PCS CARTON | 50 | 50 | 40 |