

MANIFOLDS

MINI-BALL VALVE




77660000R



- M/M mini-ball output for manifolds 1/2" – M22x1,5 red handle
- Threads ISO 228 and METRIC
- Temperature range min 0°C - max +95°C

Valve suitable for interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing and heating systems are the ideal fields of application. It's a reduced bore valve and the ball seal is guaranteed by two PTFE seats. The operating mechanism seal features two EPDM PEROX O-Rings with an internally installed stem, anti-ejection system and internal maneuver stops.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent calcareous deposits that could compromise the valve functioning.

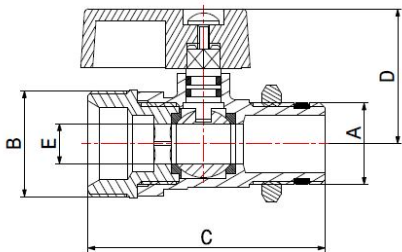

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Ball	1	CW617N UNI-EN 12164 chrome-plated
3	Seal	1	PTFE
4	O-Ring	2	EPDM Perox
5	Stem	1	CW617N UNI-EN 12164
6	Shaped seal	1	PTFE
7	End connection M22x1,5	1	CW617N UNI-EN 12164
8	Nut	1	CW617N UNI-EN 12164
9	Gasket	1	PTFE
10	Handle	1	Nylon
11	Screw	1	Stainless steel

DIMENSIONS

A	B	C	D	E	PN
1/2"	M22x1,5	60	33	10	25

PACKAGING

	1/2" - M22x1,5
CODE	77660000R
PCS BOX	20
PCS CARTON	200