


MANIFOLDS



**MANIFOLD WITH VALVE**

3745

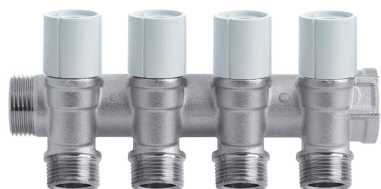

- Manifold with valves
- Finishing nickel-plated
- 1/2" side connections
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Manifold suitable for distributing and interrupting sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application. The seat tightness is guaranteed by a EPDM PEROX seal, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

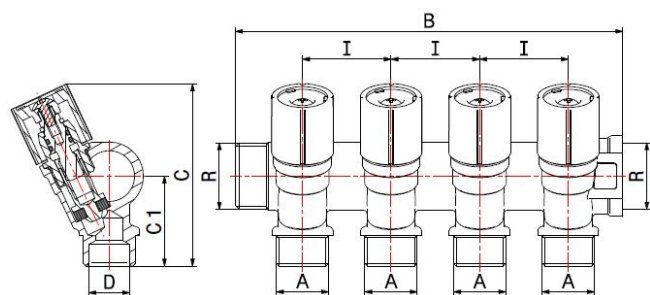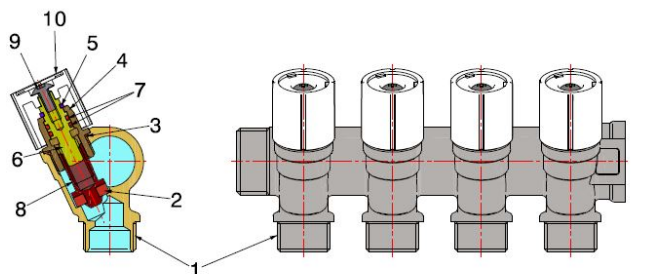

**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Gasket	1	EPDM Perox
3	Upper part O-Ring	1	EPDM Perox
4	Upper part	1	CW617N UNI-EN 12164
5	Snap ring	1	Phosphorous bronze
6	Stem	1	CW617N UNI-EN 12164
7	Stem O-Ring	2	EPDM Perox
8	Valve	1	CW617N UNI-EN 12164
9	Screw	1	Stainless steel
10	Handle	1	ABS

**DIMENSIONS**

N. OF WAY	R	A	I	B	C1	C	D	PN
2	3/4"	1/2"	35	83	36	73	16,1	10
2	1"	1/2"	35	90	37	77	16,1	10
3	3/4"	1/2"	35	118	36	73	16,1	10
3	1"	1/2"	35	125	37	77	16,1	10
4	3/4"	1/2"	35	153	36	73	16,1	10
4	1"	1/2"	35	158	37	77	16,1	10
5	3/4"	1/2"	35	188	36	73	16,1	10
5	1"	1/2"	35	195	37	77	16,1	10

**PACKAGING**

	2 WAY 3/4"	2 WAY 1"	3 WAY 3/4"	3 WAY 1"	4 WAY 3/4"	4 WAY 1"	5 WAY 3/4"	5 WAY 1"
<b>CODE</b>	<b>37450206W</b>	<b>37450208W</b>	<b>37450306W</b>	<b>37450308W</b>	<b>37450406W</b>	<b>37450408W</b>	<b>37450506W</b>	<b>37450508W</b>
PCS BAG	1	1	1	1	1	1	1	1
PCS CARTON	50	50	50	50	40	40	40	30