
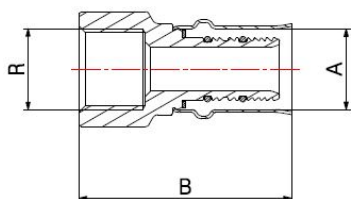


PRESS FITTINGS FOR PEX-AL-PEX PIPES

**FEMALE STRAIGHT FITTING**

4002



- Female straight press fitting
- Maximum operating pressure 10 bar
- Thread EN 10226-1
- Temperature range min 0°C – max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials.

Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

**ACS****COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	2	EPDM Perox
3	Washer	1	PTFE
4	Bushing	1	AISI 304 stainless steel

**DIMENSIONS**

A	R	B
16	1/2"	54
16	3/4"	56
18	1/2"	54
18	3/4"	56
20	1/2"	54
20	3/4"	56
20	1"	63
26	3/4"	53
26	1"	63
32	1"	55
32	1 1/4"	64

FOLLOWING THE DIMENSIONS FROM 40 TO 75

**PACKAGING**

	16 - 1/2"	16 - 3/4"	18 - 1/2"	18 - 3/4"	20 - 1/2"	20 - 3/4"	20 - 1"	26 - 3/4"	26 - 1"	32 - 1"	32 - 1 1/4"
CODE	40021604	40021606	40021804	40021806	40022004	40022006	40022008	40022606	40022608	40023208	40023210
PCS BAG	10	10	10	10	10	10	5	5	5	5	5
PCS CARTON	200	150	150	120	150	120	70	100	70	60	50