
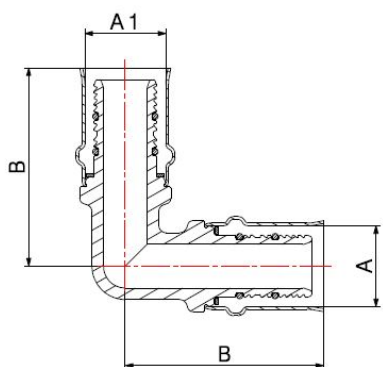


PRESS FITTINGS FOR PEX-AL-PEX PIPES

## INTERMEDIATE ELBOW FITTING

4051



- Intermediate elbow press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

## ACS

### COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	4	EPDM Perox
3	Washer	2	PTFE
4	Bushing	2	AISI 304 stainless steel

### DIMENSIONS

A	A1	B
16	16	47
18	18	50
20	20	50
26	26	52
32	32	55

FOLLOWING THE DIMENSIONS FROM 40 TO 75

### PACKAGING

	16 - 16	18 - 18	20 - 20	26 - 26	32 - 32
CODE	40511616	40511818	40512020	40512626	40513232
PCS BAG	10	10	5	5	5
PCS CARTON	150	120	100	80	50