
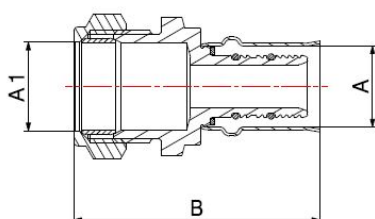



PRESS FITTINGS FOR PEX-AL-PEX PIPES

STRAIGHT FITTING WITH COMPRESSION END

4007



- Straight press fitting with compression end for copper
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water. The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%. The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165 (hot pressed) - CW617N UNI-EN 12164 (from bar)
2	O-Ring	2	EPDM Perox
3	Washer	1	PTFE
4	Bushing	1	AISI 304 stainless steel
5	Ogive	1	CW508L
6	Nut	1	CW617N UNI EN 12165

DIMENSIONS

A (Pex-Al-Pex)	A1 (Tu-Cu)	B
16	14	60
16	15	60
16	16	60
20	18	61
20	22	58

PACKAGING

	16 - 14	16 - 15	16 - 16	20 - 18	20 - 22
CODE	40071665	40071666	40071667	40072068	40072069
PCS BAG	10	10	10	10	10
PCS CARTON	200	200	200	120	120