
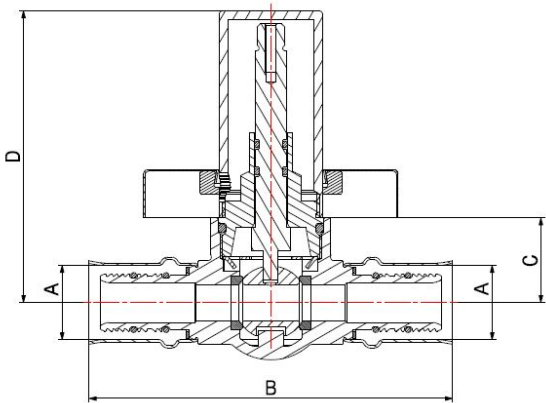


PRESS FITTINGS FOR PEX-AL-PEX PIPES

BUILT-IN BALL VALVE

4805

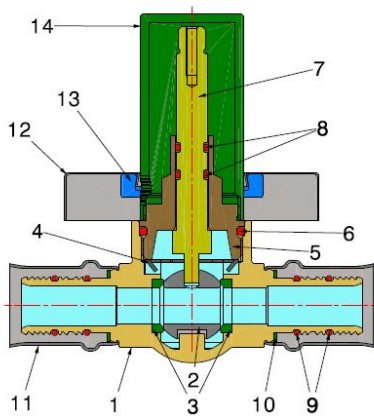

- Built-in ball valve with rosette and handle for multilayer pipe
- Knob, cap finishing chrome-plated - fitting finishing yellow
- Extractable stem and ball
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

This valve is particularly indicated for distributing, regulating and shutting off generally non-corrosive fluids that are compatible with the valve materials. An excellent field of application is in plant engineering for plumbing and heating, where it is used as a shut-off valve for built-in installation. Seat seal is provided by two PTFE seats, both of which can be removed together with the ball for maintenance purposes. Seal of the manoeuvring part is provided by two EPDM Perox O-Rings.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Ball	1	CW617N UNI-EN 12164 chrome-plated
3	Seal	2	PTFE
4	Manoeuvre retainer	1	Stainless steel
5	Upper part	1	CW617N UNI-EN 12164
6	O-Ring upper part	1	EPDM Perox
7	Stem	1	CW617N UNI-EN 12164
8	O-Ring stem	2	EPDM Perox
9	O-Ring fitting	4	EPDM Perox
10	Washer	2	PTFE
11	Bushing	2	AISI 304 stainless steel
12	Rosette	1	CW508L chrome-plated
13	Gasket rosette	1	PVC
14	Handle	1	ZAMA chrome-plated

DIMENSIONS

A	B	C min	C max	D	PN
16	100	18	66	81	10
20	100	18	66	81	10

DIMENSIONS - ARTICLES ON DEMAND

A	B	C min	C max	D	PN
26	100	20	68	83	10

PACKAGING

	16	20	26
CODE	48051616	48052020	48052626
PCS BOX	4	4	4
PCS CARTON	40	40	40