
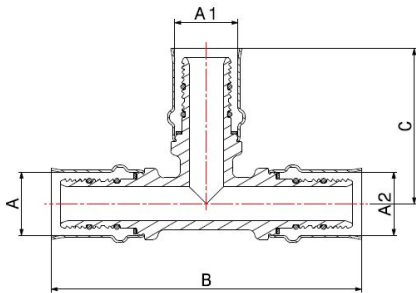


HOMEGAS PRESS FITTINGS FOR PEX-AL-PEX PIPES

INTERMEDIATE TEE FITTING

4431



- Intermediate tee press fitting for gas
- Maximum operating pressure MOP 0,5 BAR
- Temperature range min. -20°C – max. +70°C
- Manufactured according to UNI/TS11344
- The jaws to be used for the pressing are **TH** profile.

The fitting is particularly suitable for the distribution of natural gas and G PL at low pressure.

The fields of application can be the installation of new plants or replacing existing ones. Sealing is ensured by two O-Rings in NBR with yellow teflon, approved according to UNI EN 682/06 and DVGW EN 549.

The pressing of the steel sleeve ensures a perfect and indivisible grafting to the pipe and a good resistance to external stresses.



COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	6	NBR UNI-EN 682/06 - DVGW EN 549
3	Washer	3	PTFE
4	Bushing	3	AISI 304 stainless steel "gas marked"

DIMENSIONS

A	A1	A2	B	C
16	16	16	93	46,5
20	20	20	100	50
26	26	26	104	52

PACKAGING

	16 - 16 - 16	20 - 20 - 20	26 - 26 - 26
CODE	4431161616	4431202020	4431262626
PCS BAG	10	5	5
PCS CARTON	100	50	40