
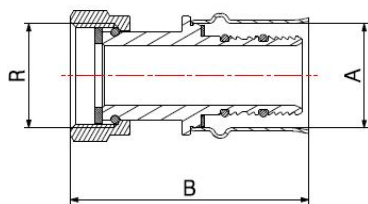



HOMEGAS PRESS FITTINGS FOR PEX-AL-PEX PIPES

STRAIGHT FITTING WITH SWIVEL NUT

4406



- Straight press fitting with swivel nut for gas
- Maximum operating pressure MOP 0,5 BAR
- Thread ISO 228
- Temperature range min -20°C - max +70°C
- Manufactured according to UNI/TS11344
- The jaws to be used for the pressing are **TH** profile.

The fitting is particularly suitable for the distribution of natural gas and GPL at low pressure.

The fields of application can be the installation of new plants or replacing existing ones. Sealing is ensured by two O-Rings in NBR with yellow teflon, approved according to UNI EN 682/06 and DVGW EN 549.

The pressing of the steel sleeve ensures a perfect and indivisible grafting to the pipe and a good resistance to external stresses.



COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12164
2	O-Ring	2	NBR UNI-EN 682/06 - DVGW EN 549
3	Washer	1	PTFE
4	Bushing	1	AISI 304 stainless steel "gas marked"
5	Nut	1	CW617N UNI-EN 12165
6	Elastic ring	1	Stainless steel
7	Gasket	1	Fasit Omnia

\* Measurements without snap ring component

DIMENSIONS

A	R	B
16*	3/4"	56
20*	3/4"	56
26	3/4"	60

PACKAGING

	16 - 3/4"	20 - 3/4"	26 - 3/4"
CODE	44061606	44062006	44062606
PCS BAG	10	10	5
PCS CARTON	150	150	100