

MANIFOLDS



SIMPLE MANIFOLD

3739



- Simple manifold
- 24x19 side connections
- Finishing sandblasted yellow or nickel-plated
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Manifold particularly suitable for distributing sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application.

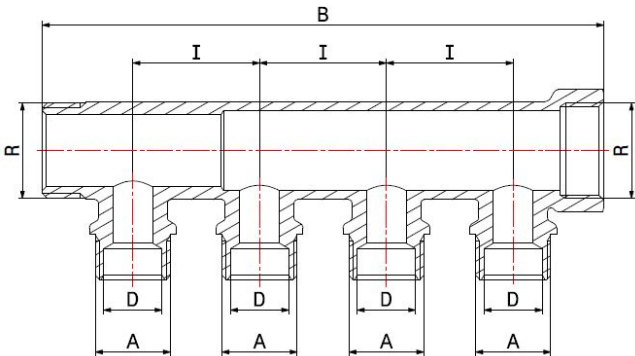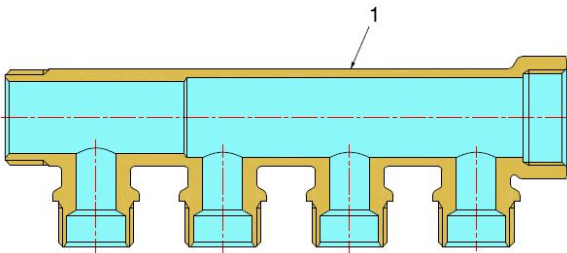

COMPONENTS			
POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165

DIMENSIONS						
N. OF WAY	R	A	I	B	D	PN
2	3/4"	24x19	35	83	18,1	10
2	1"	24x19	35	90	18,1	10
3	3/4"	24x19	35	118	18,1	10
3	1"	24x19	35	125	18,1	10
4	3/4"	24x19	35	153	18,1	10
4	1"	24x19	35	158	18,1	10
5	3/4"	24x19	35	190	18,1	10
5	1"	24x19	35	195	18,1	10

PACKAGING

	2 WAY 3/4"	2 WAY 1"	3 WAY 3/4"	3 WAY 1"	4 WAY 3/4"	4 WAY 1"	5 WAY 3/4"	5 WAY 1"
NICKEL-PLATED	37391206	37391208	37391306	37391308	37391406	37391408	37391506	37391508
YELLOW	37390206	37390208	37390306	37390308	37390406	37390408	37390506	37390508
PCS BAG	-	-	-	-	-	-	-	-
PCS CARTON	80	50	50	40	50	50	40	30