
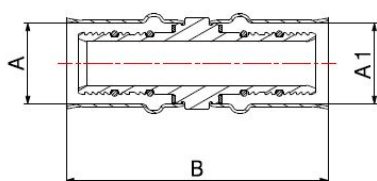


PRESS FITTINGS FOR PEX-AL-PEX PIPES

# INTERMEDIATE STRAIGHT FITTING

4003



- Intermediate straight press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water. The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%. The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

## ACS

### COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12164
2	O-Ring	4	EPDM Perox
3	Washer	2	PTFE
4	Bushing	2	AISI 304 stainless steel

### DIMENSIONS

A	A1	B
16	16	66
18	16	66
18	18	66
20	16	66
20	18	66
20	20	66

FOLLOWING THE DIMENSIONS FROM 26 TO 32

### PACKAGING

	16 - 16	18 - 16	18 - 18	20 - 16	20 - 18	20 - 20
CODE	40031616	40031816	40031818	40032016	40032018	40032020
PCS BAG	10	10	10	10	10	10
PCS CARTON	200	200	200	150	150	120