
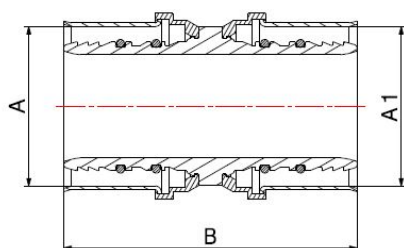



PRESS FITTINGS FOR PEX-AL-PEX PIPES

INTERMEDIATE STRAIGHT FITTING

4003



- Intermediate straight press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	4	EPDM Perox
3	Bushing holder	2	Plastic
4	Bushing	2	AISI 304 stainless steel

In sizes 20-26-32 there is no bush holder and the PTFE washer is inserted

DIMENSIONS

A	A1	B
40	20	80
40	26	80
40	32	80
40	40	84
50	20	91
50	26	91
50	32	90
50	40	92
50	50	102

FOLLOWING THE DIMENSIONS FROM 63 TO 75

PACKAGING

	40 - 20	40 - 26	40 - 32	40 - 40	50 - 20	50 - 26	50 - 32	50 - 40	50 - 50
CODE	40034020	40034026	40034032	40034040	40035020	40035026	40035032	40035040	40035050
PCS BAG	2	2	2	2	2	2	2	2	2
PCS CARTON	30	30	30	30	20	20	20	20	20