
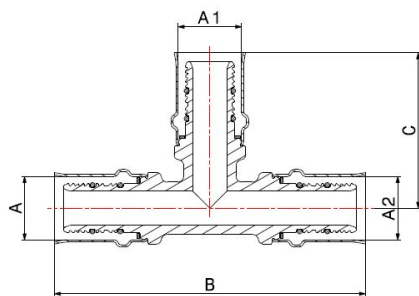


## PRESS FITTINGS FOR PEX-AL-PEX PIPES

## INTERMEDIATE TEE FITTING

4031



- Intermediate tee press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials.

Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

## ACS

## COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	6	EPDM Perox
3	Washer	3	PTFE
4	Bushing	3	AISI 304 stainless steel

## DIMENSIONS

A	A1	A2	B	C
20	26	20	106	53
26	16	16	105	53
26	16	20	105	53
26	16	26	104	53
26	20	16	105	53
26	20	20	104	52
26	20	26	104	52
26	26	16	104	52
26	26	20	104	52
26	26	26	104	52

FOLLOWING THE DIMENSIONS FROM 32

## PACKAGING

[illegible]