
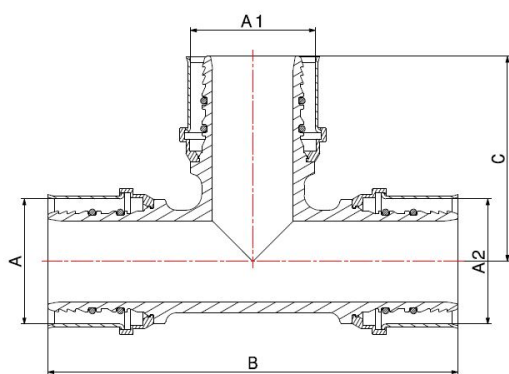


PRESS FITTINGS FOR PEX-AL-PEX PIPES

INTERMEDIATE TEE FITTING

4031

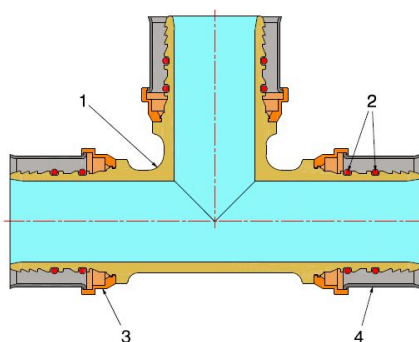

- Intermediate tee press fitting
- Maximum operating pressure 10 bar
- Temperature range min. 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	6	EPDM Perox
3	Bushing holder	3	Plastic
4	Bushing	3	AISI 304 stainless steel

In sizes 16-20-26-32 there is no bush holder and the PTFE washer is inserted

DIMENSIONS

A	A1	A2	B	C
40	20	40	132	62
40	26	40	132	62
40	32	40	132	62
40	40	40	132	66
50	16	50	164	69
50	20	50	164	69
50	26	50	164	69
50	32	50	164	69
50	40	40	155	73
50	40	50	164	73
50	50	50	164	82

FOLLOWING THE DIMENSIONS FROM 63 TO 75

PACKAGING

	40 - 20 - 40	40 - 26 - 40	40 - 32 - 40	40 - 40 - 40	50 - 16 - 50	50 - 20 - 50	50 - 26 - 50	50 - 32 - 50	50 - 40 - 40	50 - 40 - 50	50 - 50 - 50
CODE	4031402040	4031402640	4031403240	4031404040	4031501650	4031502050	4031502650	4031503250	4031504040	4031504050	4031505050
PCS BAG	2	2	2	2	2	2	2	2	2	2	2
PCS CARTON	16	16	16	16	14	14	14	14	12	12	12