
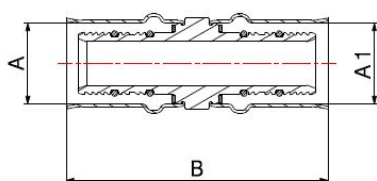


PRESS FITTINGS FOR PEX-AL-PEX PIPES

# INTERMEDIATE STRAIGHT FITTING

4003



- Intermediate straight press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water. The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%. The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

## ACS

### COMPONENTS

| POS. | PART NAME | N° | MATERIAL                 |
|------|-----------|----|--------------------------|
| 1    | Fitting   | 1  | CW617N UNI-EN 12164      |
| 2    | O-Ring    | 4  | EPDM Perox               |
| 3    | Washer    | 2  | PTFE                     |
| 4    | Bushing   | 2  | AISI 304 stainless steel |

### DIMENSIONS

| A  | A1 | B  |
|----|----|----|
| 26 | 16 | 66 |
| 26 | 18 | 66 |
| 26 | 20 | 66 |
| 26 | 26 | 66 |
| 32 | 16 | 66 |
| 32 | 20 | 66 |
| 32 | 26 | 66 |
| 32 | 32 | 66 |

FOLLOWING THE DIMENSIONS FROM 40 TO 50

### PACKAGING

|            | 26 - 16  | 26 - 20  | 26 - 26  | 32 - 16  | 32 - 20  | 32 - 26  | 32 - 32  |
|------------|----------|----------|----------|----------|----------|----------|----------|
| CODE       | 40032616 | 40032620 | 40032626 | 40033216 | 40033220 | 40033226 | 40033232 |
| PCS BAG    | 10       | 10       | 10       | 5        | 5        | 5        | 5        |
| PCS CARTON | 100      | 100      | 100      | 60       | 60       | 60       | 50       |