

WATER BALL VALVES

NIAGARA


7720



- M/F miniball valve with lever
- Thread ISO 228
- Temperature range min -10°C - max +90°C
- Normal pressure max 10 bar


Valve suitable for distributing and interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Excellent fields of application are in plant engineering for plumbing, heating and pneumatics and industry, when it is necessary to have a shut-off element with reduced dimensions. It is a reduced-bore valve, and ball seal is provided by two PTFE seats. The operating mechanism seal features an O-Ring with an internally installed stem and anti-ejection system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.



COMPONENTS			
POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12164 chrome-plated
2	Seal	2	PTFE
3	Ball	1	CW617N UNI-EN 12164 nickel-plated
4	Ring nut	1	CW617N UNI-EN 12164
5	Stem	1	CW617N UNI-EN 12164 nickel-plated
6	O-Ring	1	NBR
7	Screw	1	CIR UNI 947-72
8	Black plastic lever	1	NYLON PA66 + Glass fiber

DIMENSIONS					
DN	A	B	C	D	PN
8	1/4"	39	27	8	10
10	3/8"	40	27	9	10
15	1/2"	45	29	10	10
20	3/4"	51	32	12	10

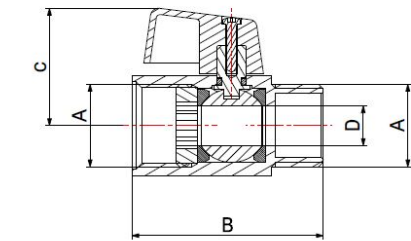

PACKAGING

	1/4"	3/8"	1/2"	3/4"
CODE	77200002	77200003	77200004	77200006
PCS BOX	30	30	25	15
PCS CARTON	300	300	250	150