

WATER BALL VALVES

NIAGARA DZR

7739

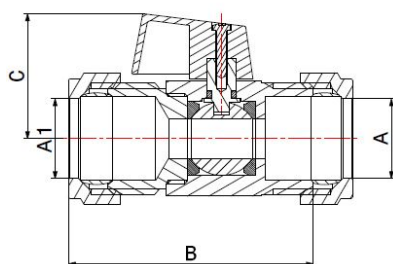



- DZR miniball valve with compression ends with lever
- Temperature range min -10°C - max +90°C
- Normal pressure max 10 bar

This valve is particularly indicated for distributing and shutting off fluids that can cause dezincification problems. Excellent fields of application are in plant engineering for plumbing, heating, pneumatic and industry, when it is necessary to have a shut-off element with reduced dimensions.

It is a reduced-bore valve, and ball seal is provided by two PTFE seats. Seal of the stem is provided by an O-Ring with the stem mounted from inside and a bottom-loaded system.

It is advisable to carry out a complete maneuver cycle at least once every three months in order to prevent limescale deposits that could compromise the valve functioning.

**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW511L UNI-EN 12164 chrome-plated
2	Seal	2	PTFE
3	Ball	1	CW511L UNI-EN 12164 nickel-plated
4	End connection	1	CW511L UNI-EN 12164 chrome-plated
5	Stem	1	CW511L UNI-EN 12164 nickel-plated
6	O-Ring	1	EPDM Perox
7	Screw	1	CIR UNI 947-72
8	Black plastic lever	1	NYLON PA66 + Glass fiber
9	Ogive	2	CW602N UNI-EN 12164
10	Nut	2	CW602N UNI-EN 12164 chrome-plated

DIMENSIONS

A	A1	B	C	PN
10	10	59	28	10
12	10	58	28	10
12	12	58	28	10
15	10	58	28	10
15	12	61	28	10
15	15	61	28	10

PACKAGING

	Ø10 - Ø10	Ø12 - Ø10	Ø12 - Ø12	Ø15 - Ø10	Ø15 - Ø12	Ø15 - Ø15
CODE	77391010	77391210	77391212	77391510	77391512	77391515
PCS BOX	5	5	5	5	5	5
PCS CARTON	100	100	100	100	100	100