

COMPONENTS FOR PLUMBING AND HEATING

CHECK VALVES

LOIRA

1010



SWING CHECK AND CHECK VALVES

b bonomi

- Loira check valve
- Female thread ISO 228
- Temperature range min 0°C - max +90°C

Valve properly used when it performs a non-return function for fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial, agricultural and pneumatic sectors are the ideal fields of application.

The flow direction is indicated by an arrow on the valve body, while the installation can be in any position.

The seat tightness is guaranteed by a NBR seal.





COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	CW617N UNI-EN 12165
3	Spring	1	AISI 302 stainless steel
4	Valve	1	Nylon
5	Gasket	1	NBR

DIMENSIONS

DN	A	B	C	PN
10	3/8"	34	49	12
15	1/2"	34	49	12
20	3/4"	42	54	12
25	1"	48	59	12
32	1.1/4"	60	67	10
40	1.1/2"	69	72	10
50	2"	95	77	10
65	2.1/2"	102	98	8
80	3"	125	103	8
100	4"	154	119	8

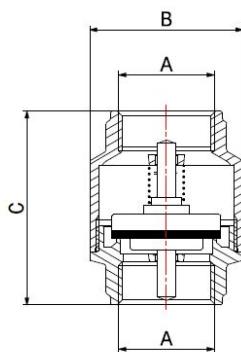

PACKAGING

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10100003	10100004	10100006	10100008	10100010	10100011	10100013	10100015	10100017	10100019
PCS BOX	25	25	20	12	6	5	3	-	-	-
PCS CARTON	250	250	200	120	72	50	30	20	15	12